SS-A50

SERVICE MANUAL

AEP Model

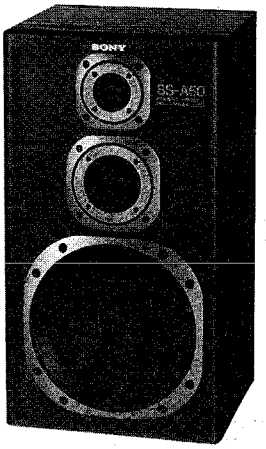

• **This set is the speaker system in XO-D50**

SPECIFICATIONS

Speaker system	3-way speaker system
Speaker units	Woofer: 16cm, cone type
	MID-RANGE: 5cm, cone type
	TWeeter: 5cm, cone type
Enclosure type	Acoustic suspension
Nominal impedance	6ohms
Power handling capacity	Music 80W
Sensitivity	88dB (1W, 1m), 6.3W (96dB, 1m)
Frequency range	45Hz to 20,000Hz
Dimensions	Approx. 230×413.5×197mm (W/h/d)
Weight	Approx. 4.4kg per speaker, net
	Approx. 9.8kg in shipping carton

1. FRONT PANEL REMOVAL

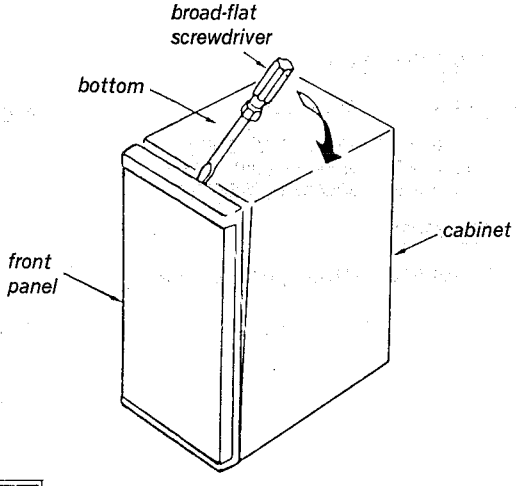

Note: Be careful not to scratch the cabinet.

2. WIRING DIAGRAM

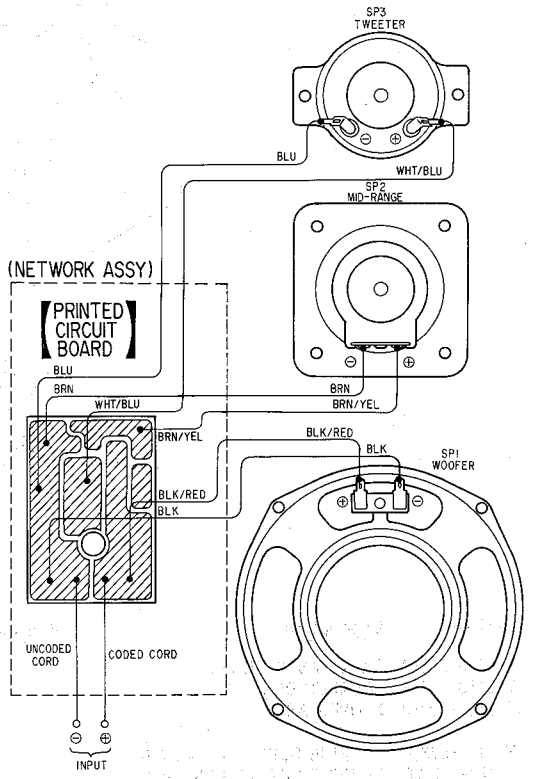

MICROFILM

SPEAKER SYSTEM

SONY®

3. EXPLODED VIEW AND PARTS LIST

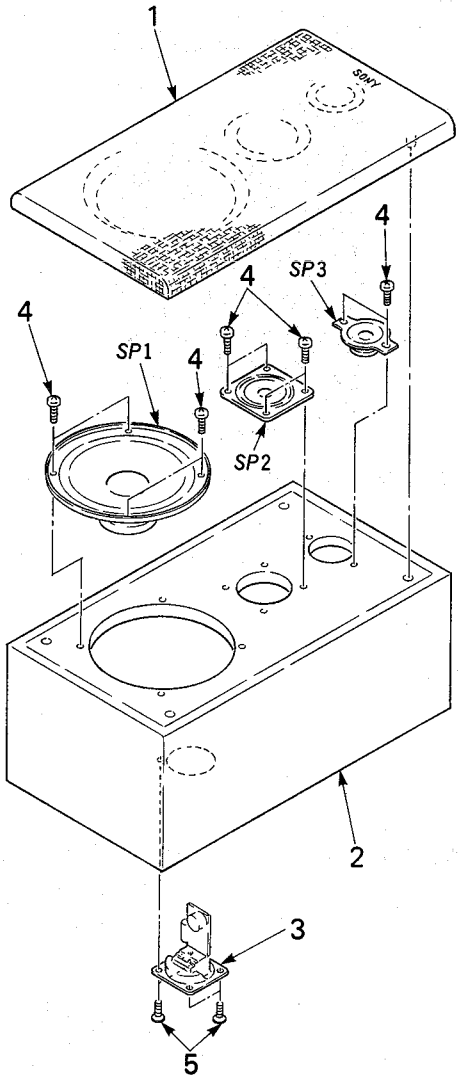

No.	Part No.	Description	Remarks
1	T-8150-292-A	PANEL ASSY, FRONT	
2	T-8150-948-1	SPEAKER BOX	
3	T-8150-293-A	X' OVER ASSY	
4	T-8150-573-1	TAPPING SCREW +P 4.2×16	
5	6-020-111-20	TAPPING SCREW +RK 2.9×13	

ELECTRICAL PARTS

Ref.No.	Part No.	Description	Remarks
SP1	T-8110-390-1	SPEAKER (WOOFER)	
SP2	T-8110-307-1	SPEAKER (MID-RANGE)	
SP3	T-8110-389-1	SPEAKER (TWEETER)	
	ACCESSORY		
	T-8150-954-1	MANUAL, INSTRUCTION	

English
88C0444-1
Printed in Japan
© 1988. 3
Published by A/V Engineering Service Dept.